


Model 73105

BNC (M) Breakout to Flying Leads

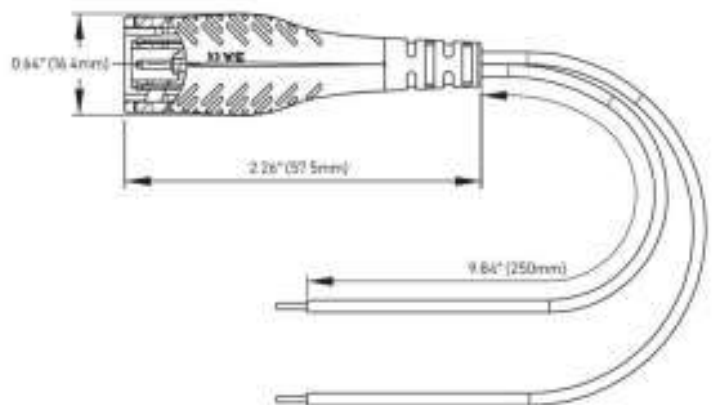

Features

- Insulated BNC connector for added protection
- Breakout quickly converts a BNC cable to flying leads
- Flying leads are silicone insulated for flexibility
- BNC center contact is gold plated for corrosion resistance, low contact resistance
- 25cm length flying leads allow for custom configurations and terminations

Materials

Center Conductor: Nickel-plated Brass, Gold-plated Brass, Annealed Copper

Insulation: Polypropylene

Wire Insulation: Silicone

Ratings

Voltage: 30 V AC / 60 V DC

Current: 3 amperes

Operating Temperature: -20°C to +80°C (-4°F to +176°F)