


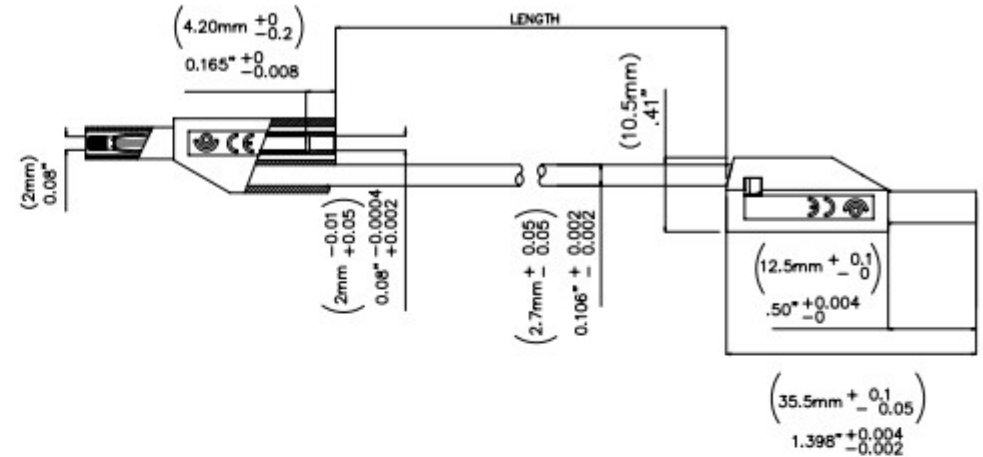

Features

- Multi-stacking 2mm safety sheathed male/male patch cord, PVC
- Rating: 600V Cat II
- 10A Max.

Materials

- Plug Body: Nickel Plated Brass
- Spring: Nickel plated Beryllium copper
- Spring tip: Polysulfone
- Insulation: Polypropylene.
- Wire Insulation: PVC.

Ordering Information

Model: 72920-Length-Color

Lengths: 20 inch (50cm) or 39in (100mm)

Colors: Black (-0) or Red (-2)

Specifications

Operating Temperature	-20 °C to +80 °C
Max Current	10A
Max Voltage	600 V CAT II
Max Resistance	15 m Ω at 20 inch 20 m Ω at 39 inch