


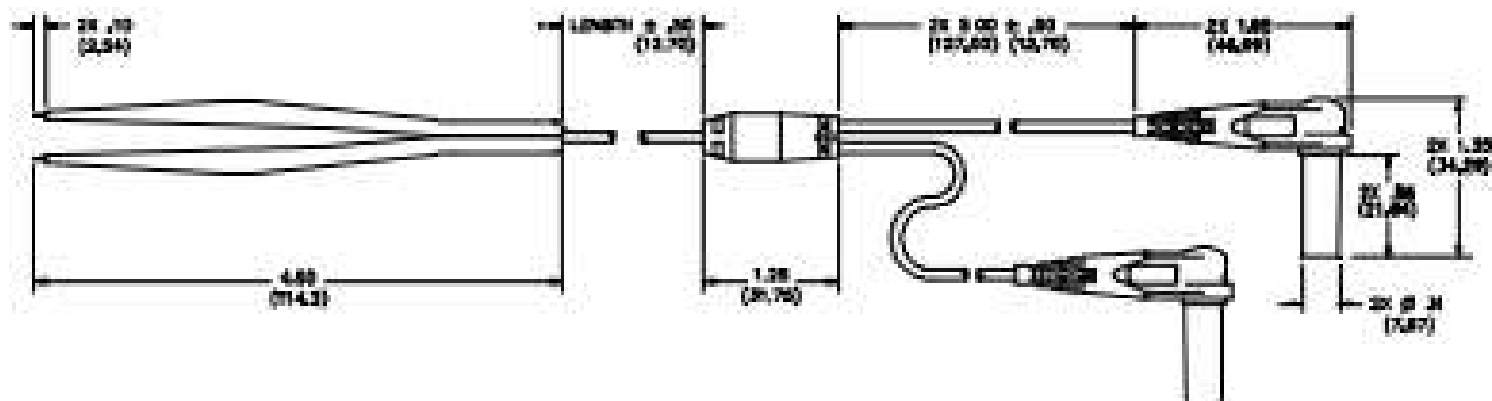

FEATURES:

- Ideal for testing SMD components.
- Two pairs of tweezers may be used as Kelvin leads with 4-wire test instruments.
- Sleeved banana plugs for mating to double insulated banana jacks.

MATERIALS:

Conn: Sleeved Banana Plug

Body: Brass

Spring: Beryllium Copper spring, nickel plated

Insulation: Flexible PVC.

RATINGS:

Operating Temperature: 122°F. (50°C)

Operating Voltage: 400 VRMS/DC

Current: 3 Amperes Max.

ORDERING INFORMATION: Model 5678

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm); .xxx = ±.003" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies. Made in USA.

5678

5678-1-1

C:\Users\Walter\Documents\5678-1-1.dwg

Sales: 800-490-2161 Fax: 888-483-3368

Technical Assistance: 800-241-2668

PomonaACCESS 90647 (800) 444-6785 or (425) 446-6010

More drawings available at www.pomonaelectronics.com

Page 1 of 1