


Model 3288 N-Type (Male) to BNC (Female) Adapter

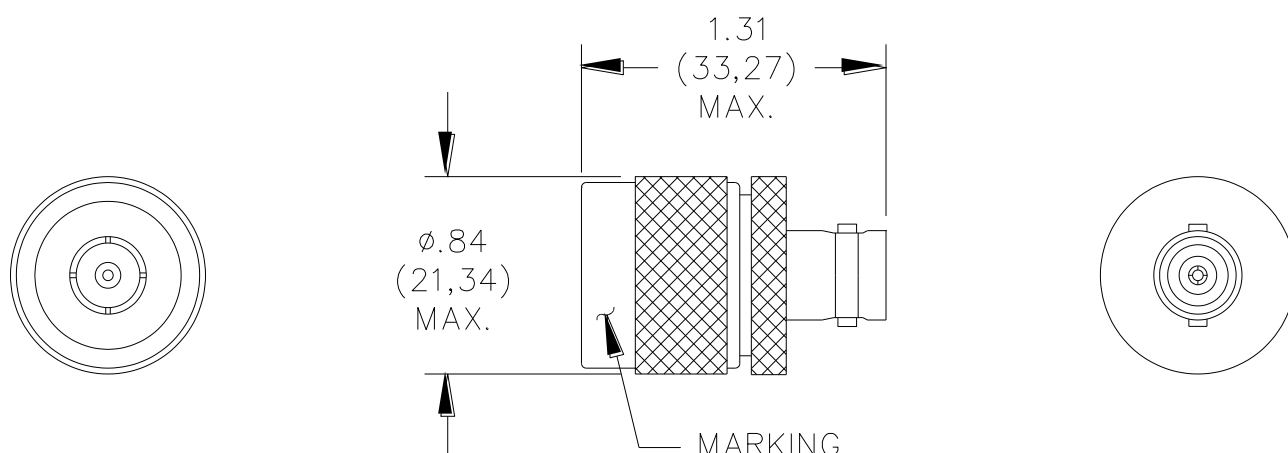


Features

- Adapter allows you to convert between N-Type connections and BNC connections
- Meets the interface requirements of MIL-STD-348

Materials

Body and Fittings:	Brass, Tarnish Resistant Nickel Plating
Center Contact:	Beryllium Copper, Gold Plated
Dielectric:	PTFE
Marking:	"Pomona 3288" (optional)

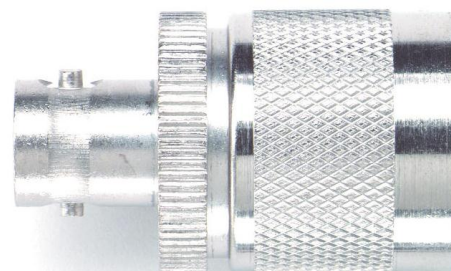

Ratings

Voltage: For *CE compliance* and for personal safety, do not hold in hand when voltages exceed 30 Vac/60 Vdc.

Maximum voltage for *hands free use* in controlled testing environments: 500 Vrms

Do not use on circuits where transient stresses can exceed the rated voltage.

Operating Temperature: -65°C to +165°C

Nominal Impedance: 50 Ohm

Ordering Information

Model: 3288

ADAPTER, BNC (F), N (M)