




Model 1432
Banana Jack to Pin Tip Plug

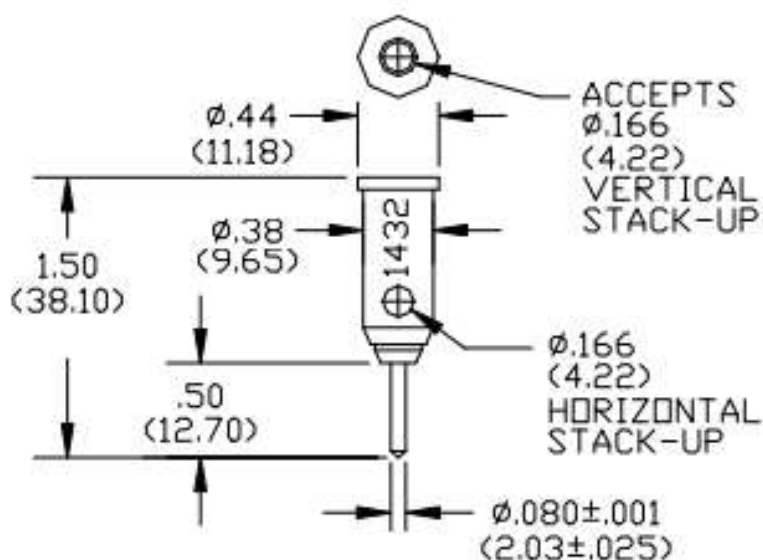

Features

- Permits banana plug cords to be used with equipment having pin tip jacks.

Materials

Banana Jack:

- Material:** Brass rod per ASTM B16-85, Temper H02.
Finish: Nickel plated per QQ-N-290, Class 2, 200/300 micro-inches.

Pin Tip Plug:

- Body:** Brass rod per ASTM B16-85, Temper H02.
Finish: Nickel plate per QQ-N-290, Class 2, 200/300 micro-inches.

Insulation:

- Material:** Polypropylene molded to Banana Plug and Pin Tip bodies.

Specifications

Operating Voltage:

Hands free usage in controlled voltage environments: 3000 Vrms maximum.

For CE compliance: not intended for hand-held use at voltages above 33 Vrms/70 Vdc.

Operating Temperature: +50°C (+122°F) Max.

Current: 5 Amperes

Ordering Information

Model: 1432-*

*=Color, -0 (Black), -2 (Red)

Ordering Example: 1432-2 (Color is Red)
Other colors are available upon request.