


Models 72925

Do-it-yourself 2mm Stackable Safety Sheathed Plug

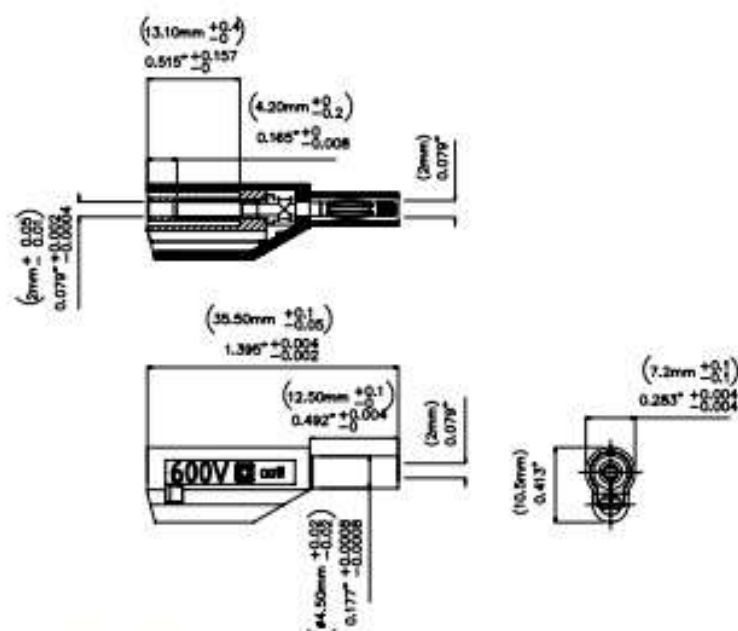

Features

- Build your own 2mm stackable Test Leads
- Plug spring is Beryllium copper for long insertion life
- Safety Rating 600 V CAT II when plug is correctly assembled and terminated.

Materials

- Plastic body: Polypropylene
- Plug body: Nickel plated brass
- Spring: Nickel plated Beryllium copper
- Spring tip: Polysulfone

Ordering Information

Model 72925-Color 10 per package
Colors: -0 (Black) and -2 (Red)

Specifications

Current	Max. 10A
Voltage	600 V CAT II
Max Resistance	Less than 5 mΩ