


Model 1581, 2854 & 4900 Panel Mount Banana Jack

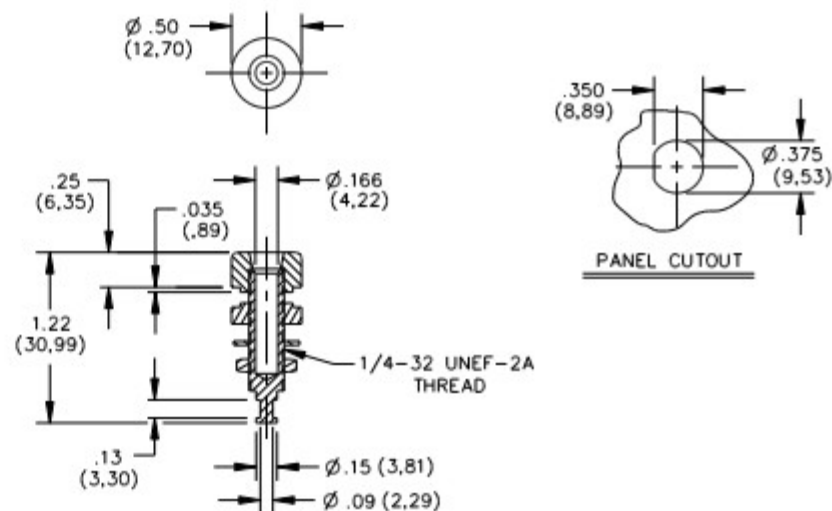

Features

- Banana Jacks mount into panels ranging in thickness from .063" (1.6mm) to .375" (9.5mm).
- Model 4900 features Polyphenylene Sulfide for high temperature applications.
- Model 2854 features gold plated body for optimum electrical connection.
- Model 1581 features bright tin plating.

Materials

Banana Jack: Body – Brass, Nickel Plated, (Model 2854, Brass, Gold Plated)

Insulators: Polycarbonate (Model 4900, High Temperature Polyphenylene Sulfide)

$1/4$ Internal Locking Washer: Steel, Nickel Plated

$1/4$ -32 Hex Nut: Brass, Nickel Plated

Ratings

Operating Temperature: +115°C (+239°F), (Model 4900 +220°C (+428°F))

Operating Voltage: For CE compliance and for personal safety, do not hold in hand when voltages exceed 30 Vrms/60 Vdc.

Maximum voltage for *hands free use* in controlled testing environments: 2500 WVDC

Do not use on circuits where transient stresses can exceed the rated voltage.

Current: 15 Amperes

Ordering Information

Model: #-Color Code

1581 Std. Colors: -0 Black, -1 Brown, -2 Red, -3 Orange, -4 Yellow, -5 Green, -6 Blue, -7 Violet, -8 Gray, -9 White

2854 Std. Colors: -0 Black, -1 Brown, -2 Red, -4 Yellow, -5 Green, -6 Blue, -8 Gray, -9 White (*Other colors*

available, contact Pomona Technical Support: technicalsupport@pomonatest.com)

4900 Std. Colors: -0 Black, -6 Blue

Sold unassembled, in packages of 10 per color

Ordering Example: 2854-2 Gold Plated Banana Jack, Color: Red