


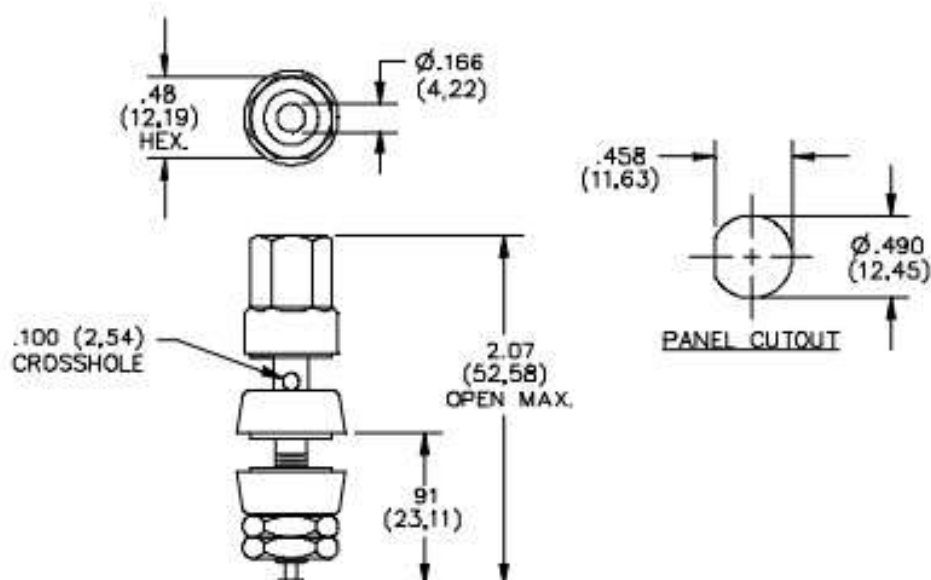

FEATURES:

- Meets requirements of MIL-P-55149/1A.

MATERIALS:

Binding Post Body, Nuts, Lockwasher: Gold Plated Brass

Insulation: Nylon MIL-P-20693

Flat Washer: Brass

Insulator: Nylon

Hex Nut: Steel

RATINGS:

Voltage: Hand-held testing: 30VAC/60VDC Max.

Hands free testing in controlled voltage environments: 1500 VRMS

Operating Temperature: $+80^{\circ}\text{C}$ ($+176^{\circ}\text{F}$) Max.

Current: 30 Amperes

ORDERING INFORMATION: Model 5018-*

*=Color, -0 Black, -2 Red, -4 Yellow, -5 Green, -6 Blue, -9 White

Ordering Example: 5018-2 Color is Red