


Model 1325, 5230, 5406, 6546 Standard Banana Plug, Solderless and Stackable



Features

- Designed to fit on the end of any 22 AWG to 18 AWG wire.
- Cross hole wire entry fits wires up to .12" (3mm) diameter.
- Available with tarnish resistant nickel or gold plating for very low contact resistance.
- Model 5230 is rated to temperatures up to +302°F (+150°C).
- Set screw simplifies assembly of test leads and jumpers by using a flat blade screwdriver.
- Fits standard panel and binding post banana jacks .161" to .166" (4.0mm to 4.2mm) diameter.

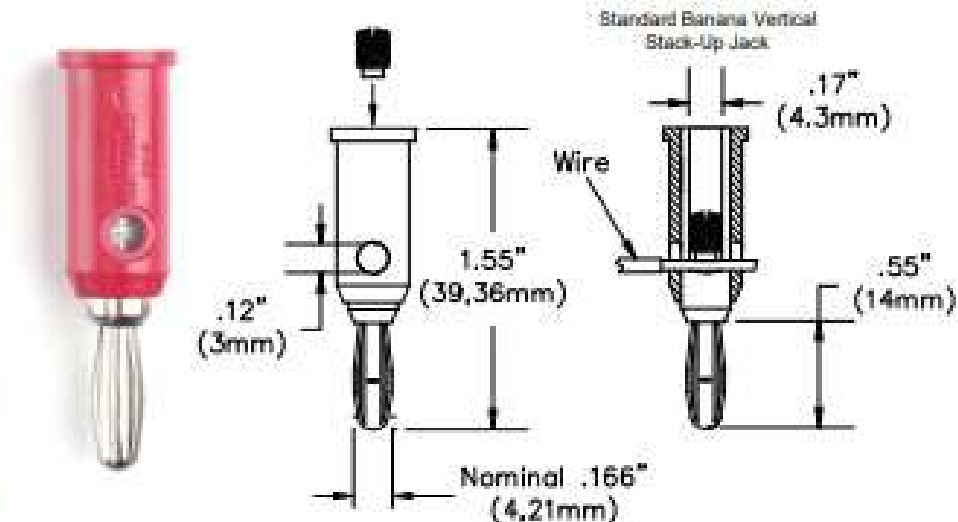

Materials

Banana Jack:	Beryllium Copper, Gold Plated
Banana Plug:	Body – Brass, Nickel Plated (Model 5406 is Gold Plated) Spring – Beryllium Copper, Nickel Plated (Model 5406 Gold Plated)
Insulation:	Polypropylene (Model 5230 is Polyphenylene Sulfide)
Set Screw:	Steel, Zinc Plated, 8-32 Single Slot

Ratings

Voltage:	For CE compliance and for personal safety, do not hold in hand when voltages exceed 33 Vrms/70 Vdc. Maximum voltage for <i>hands free use</i> in controlled testing environments: 5000 Vrms Max. Do not use on circuits where transient stresses can exceed the rated voltage.
Current:	15 Amps
Maximum Operating Temperature:	+122°F (+50°C) max. (Model 5230: +302°F (+150°C) max.)

Ordering Information

Model: 1325-**color** Nickel Plated Banana with Polypropylene Insulation
Color: 0=Black, 1=Brown, 2=Red, 3=Orange, 4=Yellow, 5=Green, 6=Blue, 7=Violet, 8=Gray, 9=White,
02=set of Black and Red
Ordering example: 1325-5 (1325 with Green Polypropylene Insulation)

Model: 5406-0 Gold Plated Banana Plug with Polypropylene Black Insulation
Model: 5406-2 Gold Plated Banana Plug with Polypropylene Red Insulation
Model: 5230-0 Nickel Plated Banana with High Temperature Black Insulation (Polyphenylene Sulfide)
Model: 5230-6 Nickel Plated Banana with High Temperature Blue Insulation (Polyphenylene Sulfide)
Model: 6546 Package of ten 1325, one of each color.
Model: 4914 Replacement Set Screws, package of 100.