
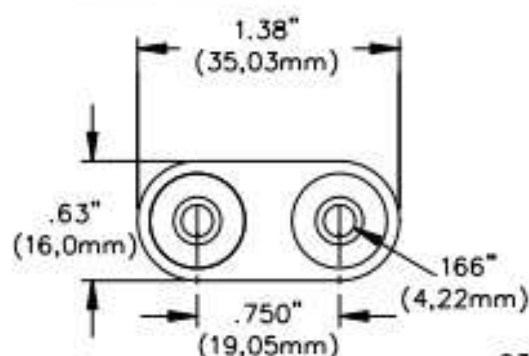


PANEL CUTOUT

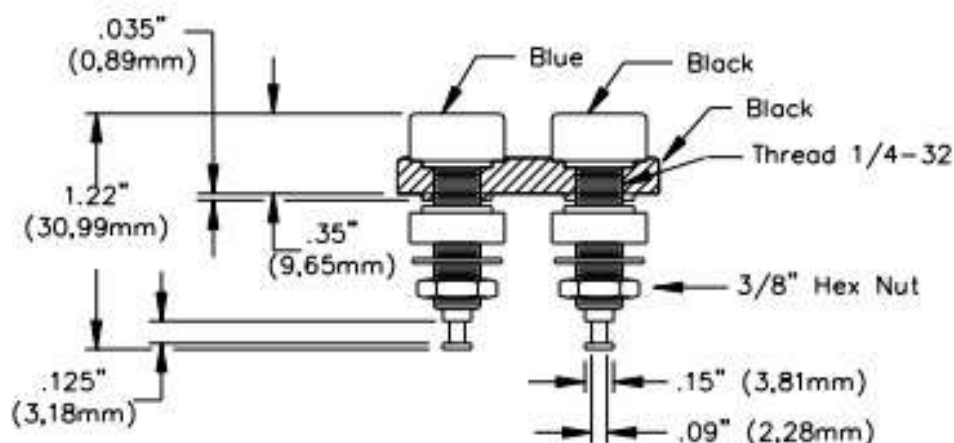

FEATURES:

- ✓ High temperature insulation material for use up to +428°F, (+220°C).
- ✓ Mounts in panels from .070" to .375" (1.60mm to 9.53mm).
- ✓ Mates with Pomona's MDP and all standard double banana plugs.
- ✓ Ideal for mounting to panels or chassis boxes.

MATERIALS:

Banana Jack Insulation: Polyphenylene Sulfide Molded to Banana Jack Bodies, Color Blue and Black

Mounting Plate: Polyphenylene Sulfide, Color Black

Insulator: Polyphenylene Sulfide

Hex Nut: 3/8" 1/4-32: Nickel Plated Brass

Lockwasher: 1/4 Internal Tooth, Nickel Plated Steel

Banana Jack Body/Solder Turret: Brass, H.H. per QQ-B-626, Alloy 360, 1/2 Hard.

Finish, Banana Jack Body/Solder Turret: Bright tin plated per MIL-T-10727.

RATINGS:

Operating Voltage: Hands free usage in controlled voltage environments: 2500 Vrms maximum. *For CE compliance:* not intended for hand-held use at voltages above 33 Vrms/70 Vdc.

Current: 15 Amperes

Operating Temperature: +428°F (+220°C).