


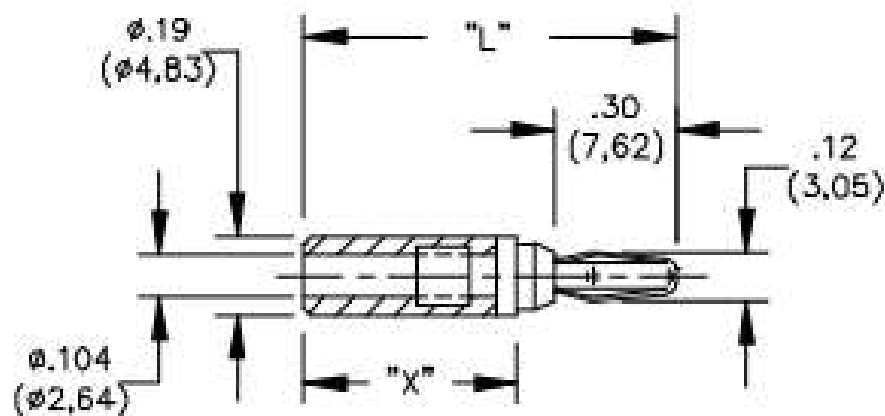

Model 3690 $"X"$ = (11.43mm) 0.45"
 $"L"$ = (22.61mm) 0.89"
 Model 4617 $"X"$ = (25.40mm) 1.00"
 $"L"$ = (36.32mm) 1.43"

FEATURES:

- Supports 20 to 22 AWG wires.
- Allows creation of custom patch cord lengths.
- Insulator unthreads to allow easy Do-It-Yourself wire soldering.
- Banana plug body & spring are gold plated for corrosion resistance and optimum electrical connection between plug and jack.
- Banana plug spring is Beryllium Copper for superior spring shape retention to ensure long insertion life.

MATERIALS:

Insulator Cap: Nylon, Color per part number

Miniature Banana Plug: Body – Brass, Gold Plated

Spring – Beryllium Copper, Gold Plated

RATINGS:

Operating Voltage: 2500 VDC

Operating Temperature: +80°C (+176°F)

Current: 5 Amperes Max.

ORDERING INFORMATION: Models 3690-* & 4617-*

* = Color, -0 Black, -2 Red