


Model 2894 Binding Post to Single Banana Plug



Model 2894
Binding Post to Single Banana Plug

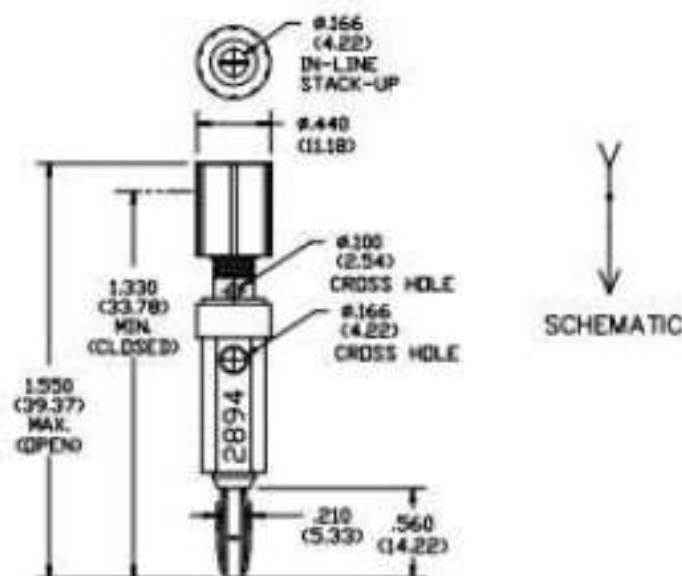

Features

- Features insulated binding post for rapid mounting and interchangeability of components.
- Center cross hole of 4.2mm (.166") dia. provides side stack-up connection.

Materials

Binding Post:

- Material:** Body – Brass per QQ-B-626, Alloy 360, 1/2 Hard.
- Finish:** Nickel plate per QQ-N-290, Class 2, 200/300 micro-inches.
- Insulation:** Polycarbonate. Color: See Ordering Information

Banana Plug:

- Body:** Brass per QQ-B-626, Alloy 360, 1/2 Hard.
- Spring:** Beryllium Copper per QQ-C-533, Alloy 172, Cond.
- Finish:** Nickel plate per QQ-N-290, Class 2, 200/300 micro-inches.

Insulation:

- Material:** Polypropylene molded to Binding Post and Banana Plug bodies.

Specifications

Operating Voltage:

Hands free usage in controlled voltage environments: 2500 Vrms maximum.

For CE compliance: not intended for hand-held use at voltages above 33 Vrms/70 Vdc.

Operating Temperature: +50°C (+122°F) Max.

Current: 15 Amperes

Ordering Information

Model: 2894-*

*=Color, -0 (Black), -2 (Red)

Ordering Example: 2894-2 (Color of Binding Post collar is Red)

Other colors available upon request.