


## Model 3847

### BNC Female to Female Adapter, Hermetically Sealed

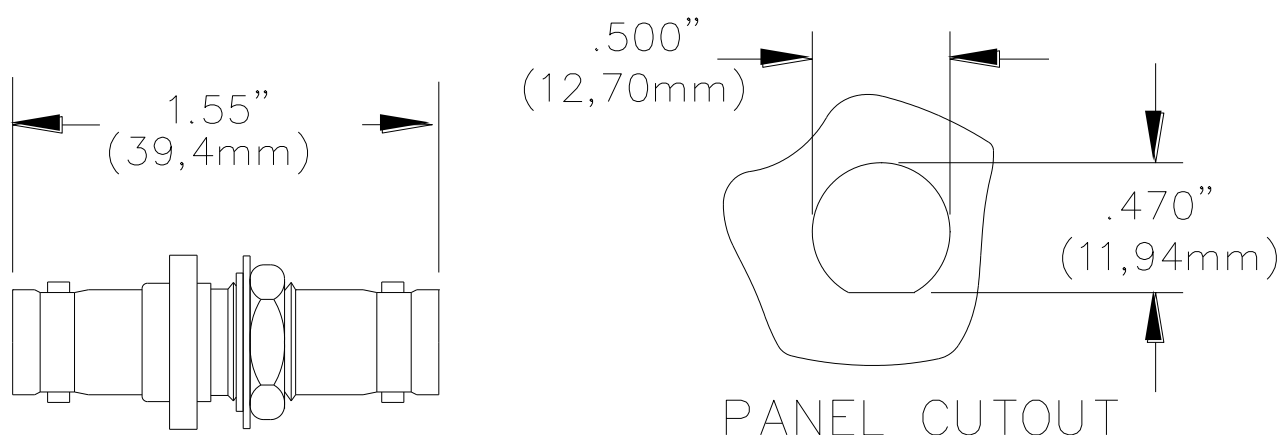

## Features

- Hermetically sealed: Leakage rate less than  $10^{-7}$  cc/sec of tracer gas at one atmosphere

## Materials

Body and Fittings: Brass, Tarnish Resistant Nickel Plated  
 Center Contact: Beryllium Copper, Gold Plated  
 Dielectric: PTFE

## Ratings

Voltage: For *CE compliance* and for personal safety, do not hold in hand when voltages exceed 30 Vrms/60 Vdc.  
 Maximum voltage for *hands free use* in controlled testing environments: 500 Vrms  
 Do not use on circuits where transient stresses can exceed the rated voltage.

Temperature: -65°C to +165°C  
 Nominal Impedance: 50 Ohm

## Ordering Information

Model: 3847  
 BNC (F-F), HERMETICALLY SEALED