


Model 5935 2mm (.080in) Insulated Banana Jack

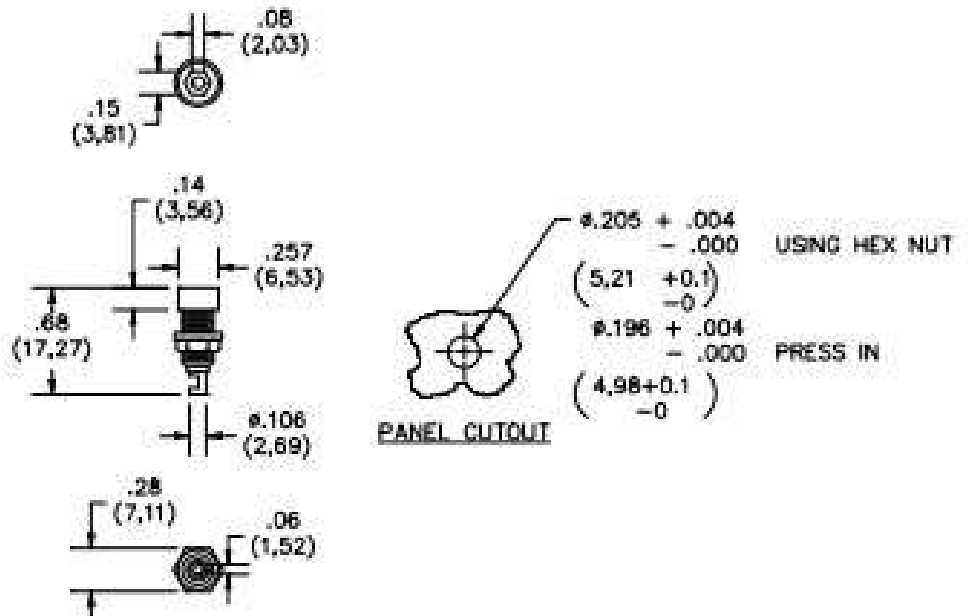

Features

- Banana jack is insulated from the panel
- Solder hole at the bottom of the jack allows for 18 to 22 AWG wire attachment
- Recommended maximum panel thickness: .31" (8,0 mm)

Materials

Banana Jack and Nut: Brass, Nickel Plated
Insulator: Nylon

Ratings

Operating Voltage: For CE Compliance and for personal safety, do not hold in hand when voltages exceed 30 Vrms/60 Vdc. Maximum voltage for hands free use: 500 Vrms.
Do not use on circuits where transient stresses can exceed the rated voltage.

Operating Current: 5 Amperes Max.

Ordering Information

Model: 5935-*

* = Standard Color: -0 Black

Sold in packages of 10

Ordering Example: 5935-0, Banana Jack is Black.