


### FEATURES:

- ✓ Flexible test lead sets are a perfect interface for multimeters configured with 4 mm sheathed safety jacks.
- ✓ Test leads comply with IEC 1010-2-031.
- ✓ Plug and housing are molded directly to the cable in an integral one piece design and the wire is double crimped for a long lasting connection.
- ✓ Multi-leaf banana spring is beryllium copper, nickel plated for extended insertion cycle life and low contact resistance.
- ✓ High strand count silicone insulated wire offers excellent flexibility and high temperature resistance.
- ✓ Test leads can mate to a broad assortment of Pomona test probes, alligators, spade lugs, etc.

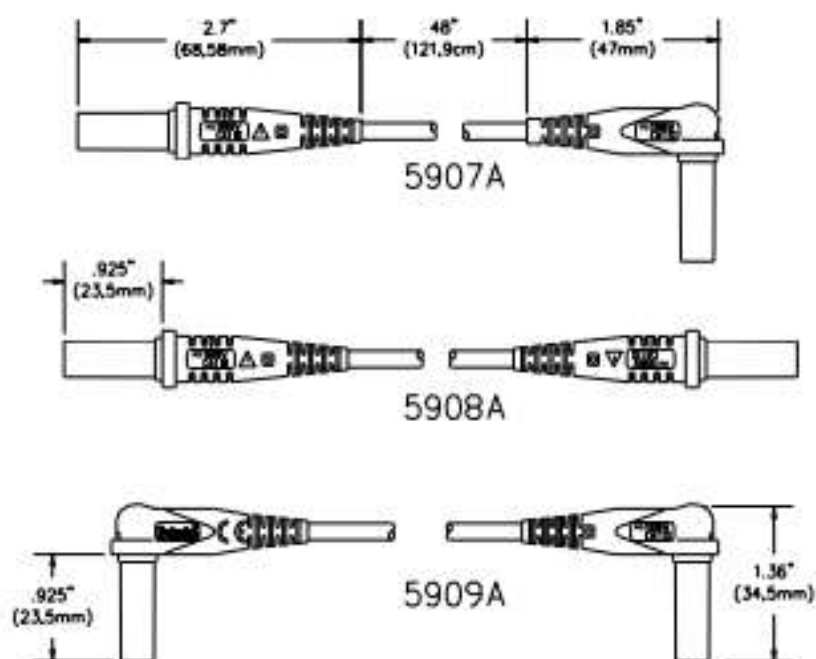

### MATERIALS:

*Plug:* Brass, Nickel plated

*Spring:* Beryllium Copper, Nickel plated

*Insulator:* Santoprene

*Wire:* 18 AWG

*Wire Insulation:* Silicone, O.D. 0.144" Nom.

### RATINGS:

IEC 1010 2-031, Category III, P2 Compliant

Operating Temperature: -4° to +131°F (-20 to +55°C)

Operating Voltage: 1,000 VRMS/DC Max.

Current: 10 Amperes Max.

### ORDERING INFORMATION:

Standard length is 48" (121.9cm)\*

Model: 5907A (set includes one red and one black lead - ideal for hand-held multimeters)

Model: 5908A (set includes one red and one black lead - ideal for bench multimeters)

Model: 5909A (set includes one red and one black lead - ideal for special right angle access applications)