


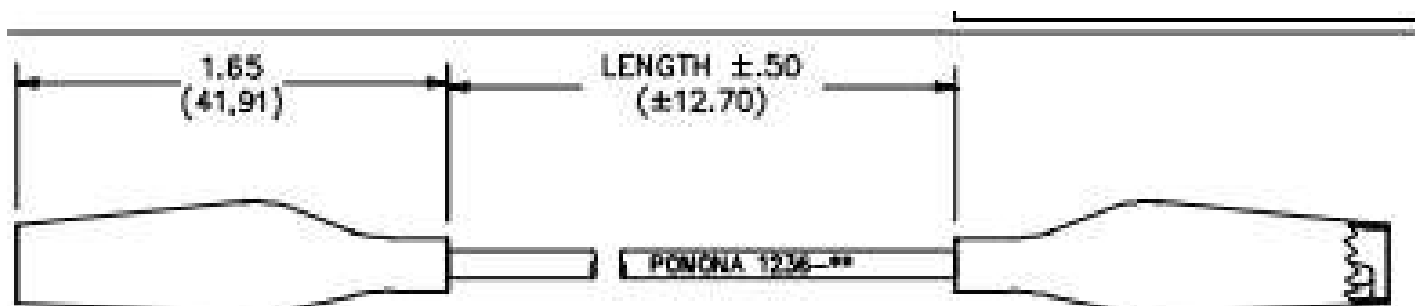

FEATURES:

- Features flex boots for insulation protection.
- Alligators are nickel plated for tarnish resistance.
- Alligators clip has .187" (4.75mm) max. jaw opening.
- Ideal for use as temporary wire.

MATERIALS:

Alligator.

Body: Steel, Nickel Plated

Spring Stainless Steel

Flex Boat Vinyl

(Model 1236) 20 AWG, Stranding: 41 x 36 tinned copper, PVC Insulation, .087" (2.21 mm) O.D.

Marking: "POMONA 1236-XX"

(Model MG-B) 18 AWG. Stranding: 65 x 36 tinned copper. PVC Insulation. .144" (3.66 mm) O.D.

Marking: "POMONA MG-B-XX"

RATINGS:

Operating Voltage: 30VAC/60VDC MAX.

Operating Temperature: +50°C (+122°F)

Current: 5 Amperes

ORDERING INFORMATION: Model 1236-XX-#. Model MG-B-XX-#

XX = Length in inches

Standard Lengths: 4" (10.16mm), 8" (20.32mm), 12" (30.48mm), 24" (60.96mm), 36" (91.44mm).

48" (121.92mm) & 60" (152.40mm). Additional lengths can be quoted upon request.

* = Color of Flex Boot and Wire. -0 Black. -2 Red.

All dimensions are in inches. Tolerances except noted: .0015" (+.0015" / -.0015")

All specifications are to the latest revisions. Specifications are subject to change without notice.

Recurrent malnutrition is the result of their recurrent exposure. Malnutrition is