


## Features

- Designed to fit on the end of any 22 AWG to 18 AWG wire.
- Cross hole wire entry fits wires up to .12" (3mm) diameter.
- Available with tarnish resistant nickel or gold plating for very low contact resistance.
- Model 4899 is rated to temperatures up to +302°F (+150°C).
- Set screw simplifies assembly of test leads and jumpers by using a flat blade screwdriver.
- Fits standard panel and binding post banana jacks .161" to .166" (4,0mm to 4,2mm) diameter.

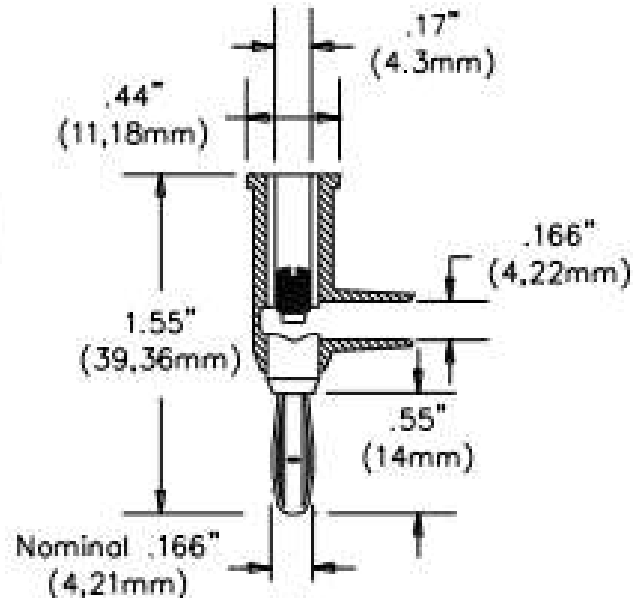

## Materials

|              |                                                                                                                                      |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Banana Jack: | Zinc Die Cast, Nickel Plated (Model 4897 is Gold Plated)                                                                             |
| Banana Plug: | Body – Zinc Die Cast, Nickel Plated (Model 4897 is Gold Plated)<br>Spring – Beryllium Copper, Nickel Plated (Model 4897 Gold Plated) |
| Insulation:  | Polypropylene (Model 4899 is Polyphenylene Sulfide)                                                                                  |
| Set Screw:   | Steel, Zinc Plated, 8-32 Single Slot                                                                                                 |

## Ratings

|                                |                                                                                                                                                                                                                                                                                      |
|--------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Voltage:                       | For CE compliance and for personal safety, do not hold in hand when voltages exceed 30 Vrms/60 Vdc.<br>Maximum voltage for <i>hands free use</i> in controlled testing environments: 5000 Vrms Max.<br>Do not use on circuits where transient stresses can exceed the rated voltage. |
| Current:                       | 15 Amps                                                                                                                                                                                                                                                                              |
| Maximum Operating Temperature: | +122°F (+50°C) max. (Model 4899: +302°F (+150°C) max.)                                                                                                                                                                                                                               |

## Ordering Information

**Model:** 1825-*color* Nickel Plated Banana Plug with Polypropylene Insulation  
**Color:** 0=Black, 1=Brown, 2=Red, 3=Orange, 4=Yellow, 5=Green, 6=Blue, 7=Violet, 8=Gray, 9=White,  
02=set of Black and Red  
**Ordering example:** 1825-5 (1825 with Green Polypropylene Insulation)

**Model:** 4897-0 Gold Plated Banana Plug with Polypropylene Black Insulation  
**Model:** 4897-2 Gold Plated Banana Plug with Polypropylene Red Insulation  
**Model:** 4899-0 Nickel Plated Banana with High Temperature Black Insulation (Polyphenylene Sulfide)  
**Model:** 4899-6 Nickel Plated Banana with High Temperature Blue Insulation (Polyphenylene Sulfide)  
**Model:** 6545 Package of ten 1325, one of each color.  
**Model:** 4914 Replacement Set Screws, package of 100.