




BNC Female PCB Mount

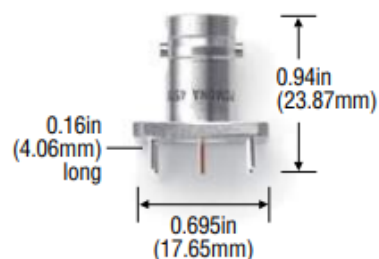


4578/6747




4788/6748

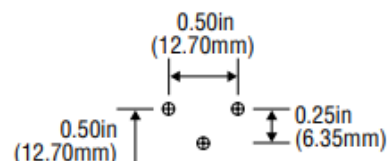


**Cut-Out for
4578/4788/6747/6748**

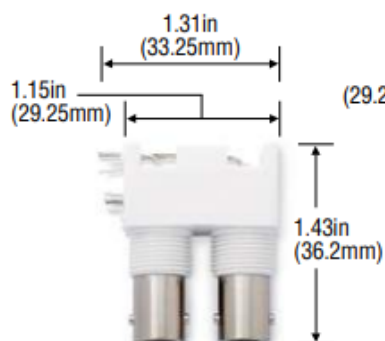

6717

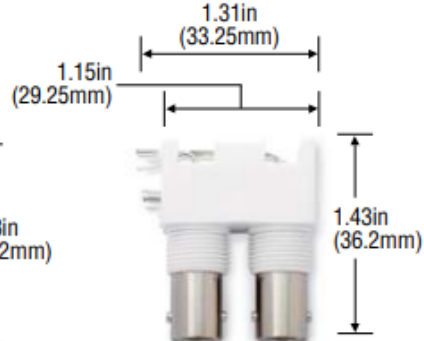

6718

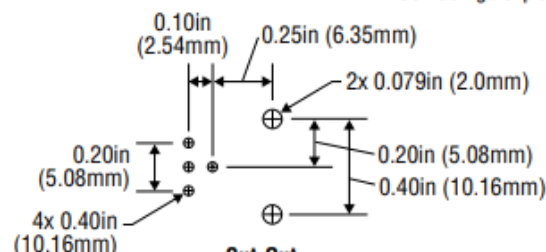

**Cut-Out
for 6717/6718**

Model#	Type	Material
50Ω Impedance		
4578	Vertical BNC	—
4788	R/A BNC	Brass
6717	Dual R/A BNC	White Valox
75Ω Impedance		
6718	BNC (f)	White Valox
6747	BNC (f)	Vertical
6748	BNC (f)	Right Angle

Rating: Maximum voltage for *hands free use*:
500 Vrms*, *Impedance*: 50Ω, -85 to +329°F
(+165 to -65°C).

BNC: *Body*: tarnish resistant nickel-plated brass;
Contact: gold-plated beryllium copper. *Dielectric*: PTFE.